






# ADA Quick Reference Guide — Parking

## Accessible Parking Space Minimums

These specifications are in accordance with ORS 447.233 (<https://tinyurl.com/yc8baepp>). The number of parking spaces open to the public shall comply with the following:

Total in parking lot	 Required minimum number of accessible spaces	 Required minimum number of “Van Accessible” spaces	 Required minimum number of “Wheelchair User Only” spaces
1 to 25	1	1	-
26 to 50	2	1	-
51-75	3	1	-
76-100	4	1	-
101-150	5	-	1
151 to 200	6	-	1
201 to 300	7	-	1
301 to 400	8	-	1
401 to 500	9	-	2
501 to 1000	2% of total	-	1 in every 8 accessible spaces or portion thereof
1001 and over	20 plus 1 for each 100 over 1000	-	1 in every 8 accessible spaces or portion thereof


## Sign Mounting

Post mounted signs shall be installed with a vertical clearance of 7’ between the bottom of the sign to the ground line; 5’ minimum if mounted on a building.



# Minimum Standard Double-Accessible Parking Space


(One van-accessible designation required)

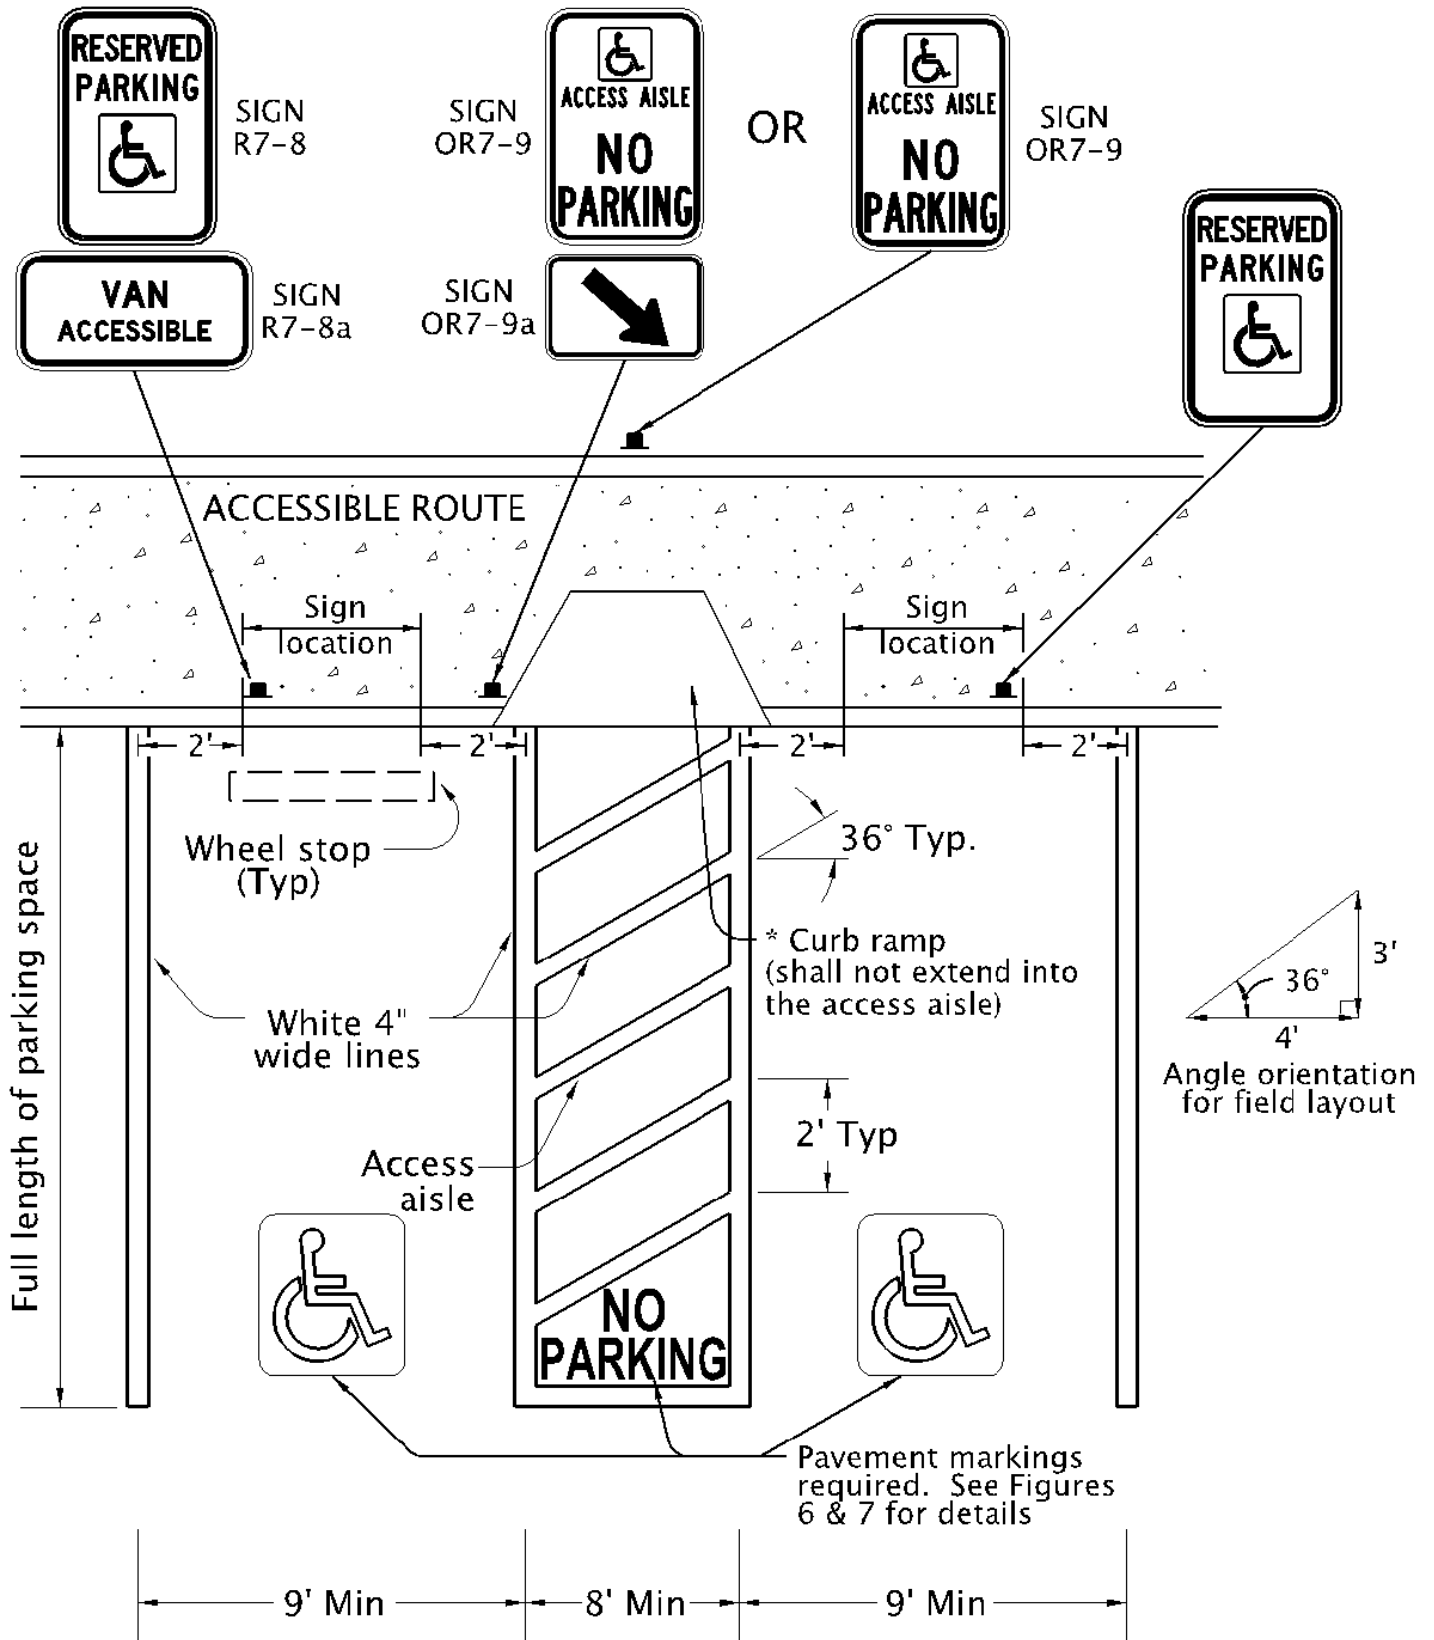


\* Detectable warning surface required if curb ramp is located within public right-of-way

# Minimum Standard Five-Accessible Parking Spaces

(One wheelchair user designation required)

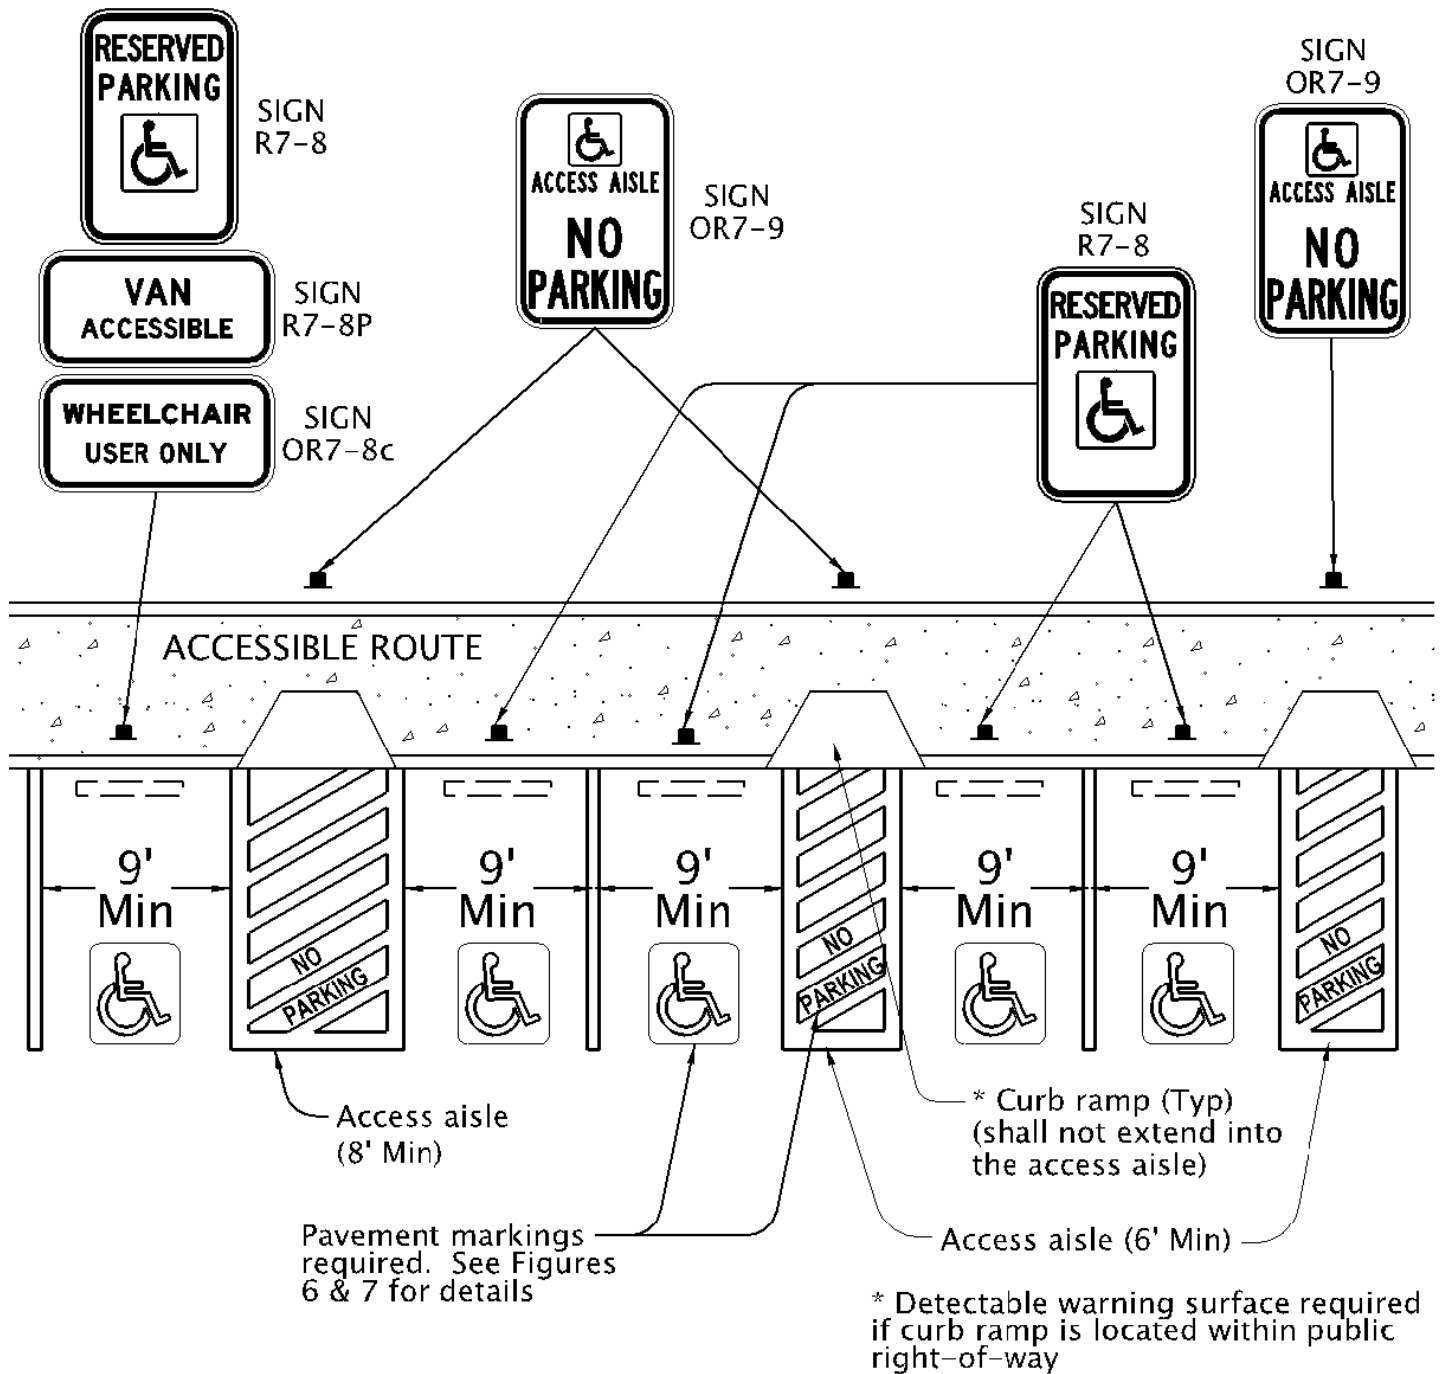

# Angle-Accessible Parking Layout

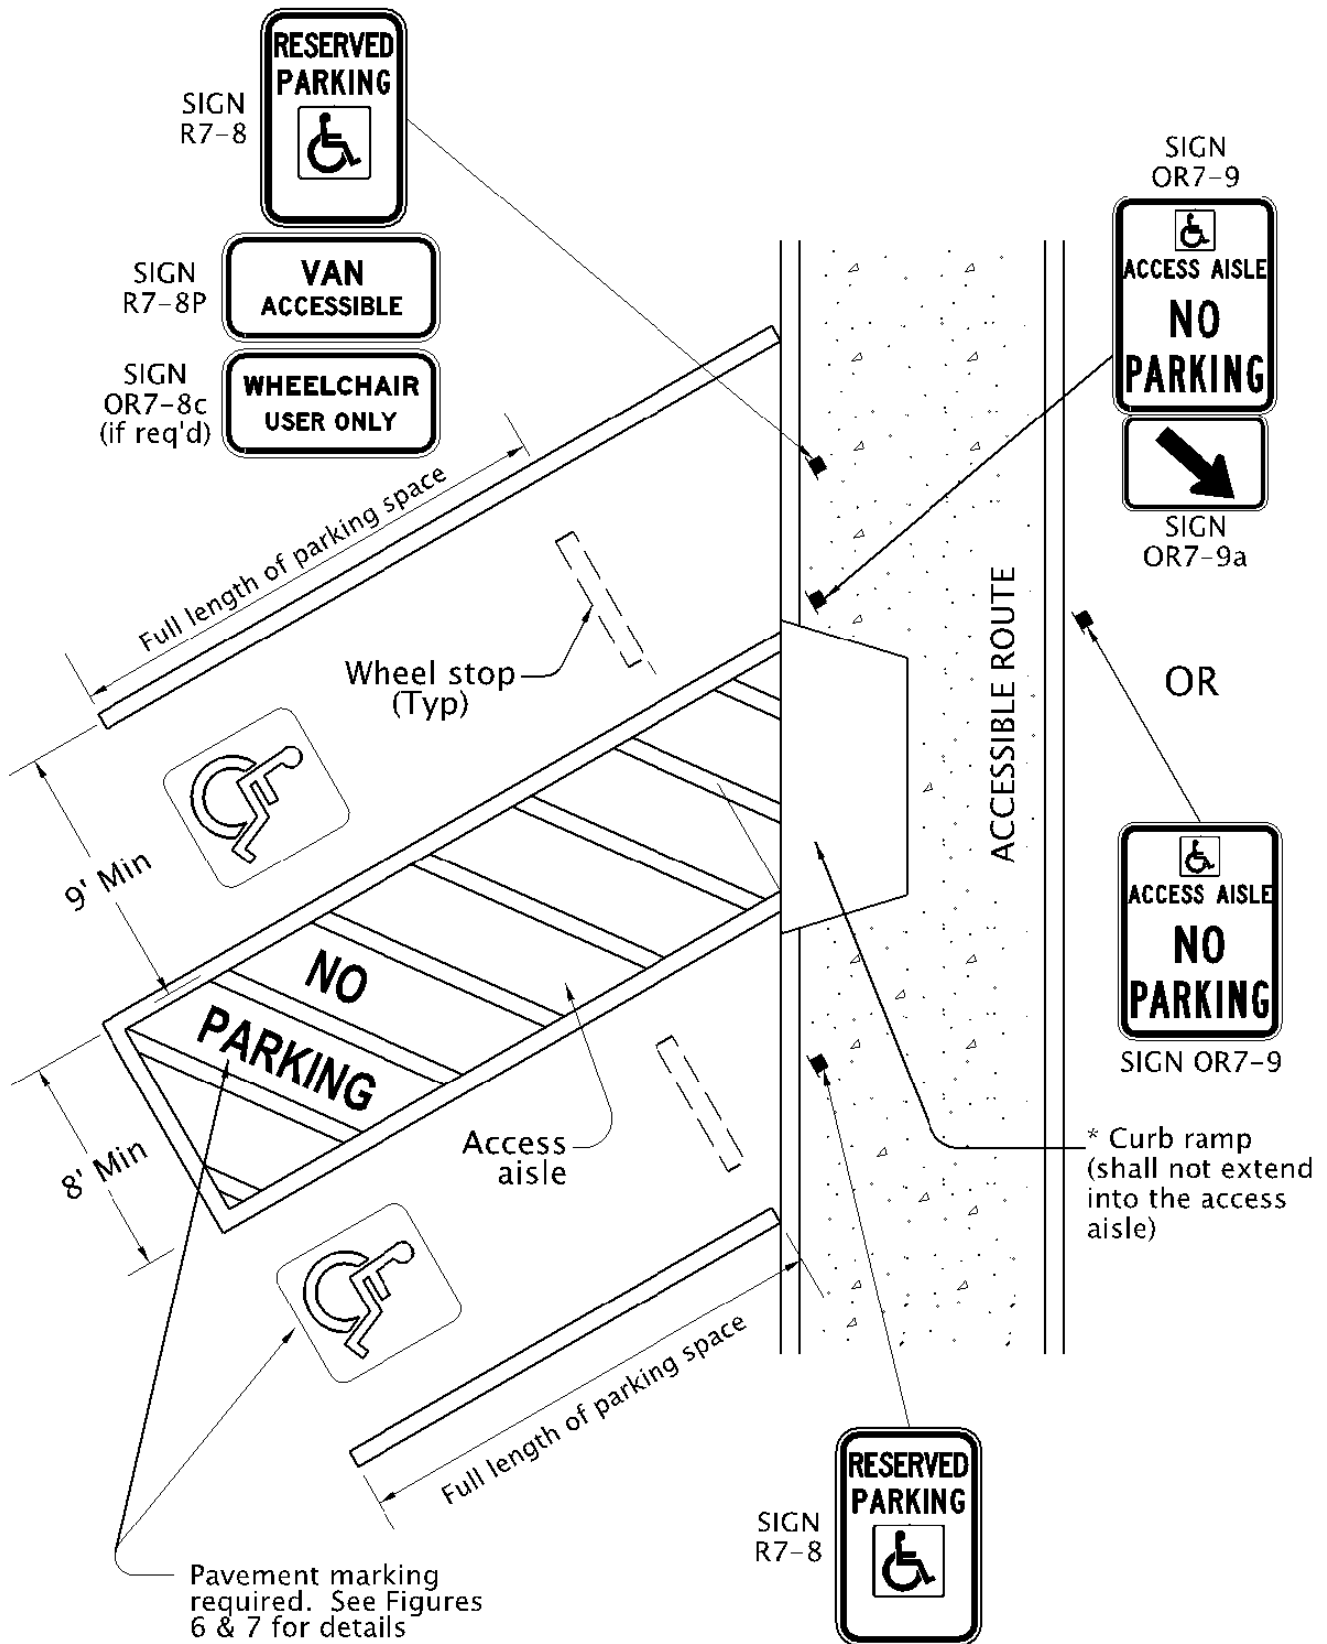

\* Detectable warning surface required if curb ramp is located within public right-of-way

## Sources:

- **ORS 447-233**, Accessible parking space requirements; inspection of spaces; violation:  
<https://tinyurl.com/yc8baepp>
- **Oregon Transportation Commission Standards for Accessible Parking Places August 2018:**  
<https://tinyurl.com/53feb46e>